


## NOZZLE INSTALLATION

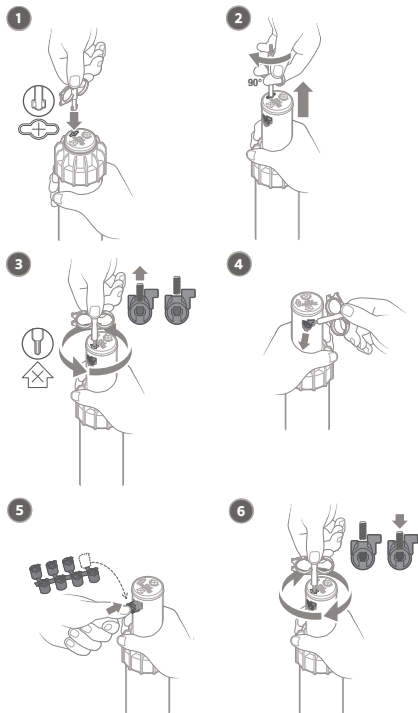


### SRM-04 PERFORMANCE DATA


Nozzle	Pressure PSI	Radius ft.	Flow GPM	Precip in/hr	
				■	▲
0.50	30	14	0.42	0.41	0.48
	40	15	0.50	0.43	0.49
	50	16	0.58	0.44	0.50
0.75	30	15	0.64	0.55	0.63
	40	16	0.75	0.56	0.65
	50	17	0.85	0.57	0.65
1.0	30	18	0.85	0.51	0.58
	40	19	1.0	0.51	0.59
	50	19	1.1	0.57	0.66
1.5	30	21	1.3	0.57	0.66
	40	22	1.5	0.60	0.69
	50	22	1.7	0.67	0.77
2.0	30	24	1.7	0.55	0.64
	40	25	2.0	0.62	0.71
	50	25	2.3	0.71	0.82
2.5	30	27	2.2	0.58	0.67
	40	28	2.5	0.60	0.69
	50	28	2.8	0.68	0.79
3.0	30	30	2.5	0.53	0.62
	40	31	3.0	0.60	0.69
	50	31	3.4	0.68	0.79
4.0	30	33	3.7	0.65	0.76
	40	33	4.0	0.71	0.82
	50	34	4.3	0.72	0.83

Note: All precipitation rates calculated for 180 degree operation. For the precipitation rate for a 360 degree sprinkler, divide by 2.

## ARC ADJUSTMENT

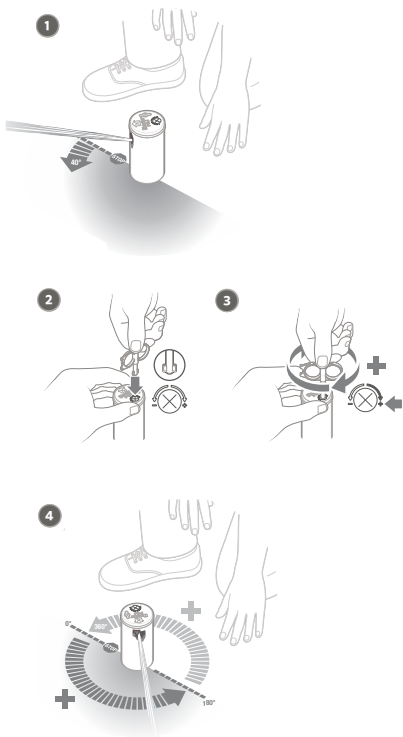

## RADIUS ADJUSTMENT



Note: All precipitation rates calculated for 180 degree operation. For the precipitation rate for a 360 degree sprinkler, divide by 2.

## SRM-04 PERFORMANCE DATA

Nozzle	Pressure		Radius	Precip in/hr		Precip in/hr	
	bar	kPa		m <sup>3</sup> /hr	l/min	■	▲
0.50	1.7	170	4.3	0.08	1.4	9	11
	2.0	200	4.3	0.09	1.6	10	12
	2.5	250	4.6	0.11	1.8	10	12
	3.0	300	4.6	0.12	2.0	12	13
	3.5	350	4.9	0.13	2.2	11	13
3.8	380	4.9	0.14	2.3	12	14	
0.75	1.7	170	4.3	0.13	2.2	14	17
	2.0	200	4.6	0.14	2.4	14	16
	2.5	250	4.9	0.16	2.7	13	15
	3.0	300	5.2	0.18	3.0	13	15
	3.5	350	5.2	0.19	3.2	14	17
3.8	380	5.5	0.20	3.4	13	15	
1.0	1.7	170	5.2	0.18	3.0	13	15
	2.0	200	5.5	0.19	3.2	13	15
	2.5	250	5.5	0.21	3.5	14	16
	3.0	300	5.8	0.23	3.8	14	16
	3.5	350	5.8	0.24	4.1	15	17
3.8	380	6.1	0.25	4.2	14	16	
1.5	1.7	170	6.1	0.27	4.5	15	17
	2.0	200	6.4	0.29	4.8	14	16
	2.5	250	6.4	0.32	5.4	16	18
	3.0	300	6.7	0.36	6.0	16	18
	3.5	350	6.7	0.39	6.4	17	20
3.8	380	7.0	0.40	6.7	16	19	
2.0	1.7	170	7.0	0.34	5.6	14	16
	2.0	200	7.3	0.37	6.2	14	16
	2.5	250	7.3	0.42	7.1	16	18
	3.0	300	7.6	0.48	8.0	17	19
	3.5	350	7.6	0.53	8.8	18	21
3.8	380	7.9	0.56	9.3	18	20	
2.5	1.7	170	7.9	0.46	7.6	15	17
	2.0	200	8.2	0.49	8.1	14	17
	2.5	250	8.2	0.54	9.0	16	18
	3.0	300	8.5	0.59	9.8	16	19
	3.5	350	8.5	0.63	10.5	17	20
3.8	380	8.8	0.65	10.9	17	19	
3.0	1.7	170	8.8	0.51	8.5	13	15
	2.0	200	9.1	0.56	9.3	13	15
	2.5	250	9.1	0.64	10.6	15	18
	3.0	300	9.4	0.72	12.0	16	19
	3.5	350	9.4	0.78	13.1	18	20
3.8	380	9.8	0.82	13.7	17	20	
4.0	1.7	170	9.8	0.80	13.3	17	19
	2.0	200	10.1	0.83	13.8	16	19
	2.5	250	10.1	0.89	14.8	18	20
	3.0	300	10.4	0.94	15.7	17	20
	3.5	350	10.4	0.98	16.3	18	21
3.8	380	10.7	1.00	16.7	18	20	