


RAINTAP - WATER DIVERTER FOR DOWNPIPES

Fitted to household downpipes rainfall can be diverted to your garden or swimming pool simply by attaching the garden hose to the outlet. One millimetre of rain on the average house roof, generates 250 litres of water. Without a diversion system this water runs to waste.

FEATURES

- Suits 90mm downpipe
- Can be adapted to other downpipe sizes (adapters required)
- Overflow protection
- Easy removal for cleaning
- Slip joint installation
- Supplied with standard hose click on fitting - supplied
- Can be used with Raintap valve (not supplied)
- Diverter can be painted

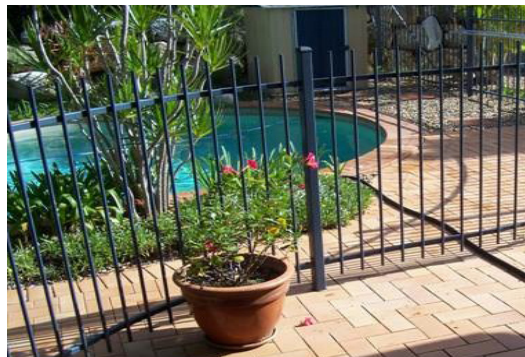

HOW THE RRAINTAP WORKS

Fitted to your downpipe, rainfall will be diverted to your garden, swimming pool, pond or spa simply attaching the garden hose to the diverter outlet. In heavy rain, the diverters unique overflow system directs excess water away as usual. To stop water diversion, remove hose fitting and replace with a plug (not supplied). For easy simple on / off opening install the Raintap shut off valve (not supplied). (See page 2 for picture detail)

FITTING INSTRUCTIONS

Cut a 320mm gap in the downpipe. The bottom cut should be at least one metre above target area. If fitting to a rectangular pipe, allow the same gap between adapters.

Remove "Slip Joint" and push up onto top downpipe section.

Position diverter body into gap locating the tapered fins into the bottom downpipe. Lower "Slip Joint" down to engage diverter. DO NOT GLUE the diverter into downpipe.

If required a screw can be inserted to lock the "Slip Joint" to the downpipe.

If using adapters to fit diverter to rectangular or round pipe sizes other than 90mm, insert

the short section of 90mm pipe supplied into the top adapter to convert it to a male fitting

to accommodate the slip joint.

(See page 2 for picture details)

CLEANING

Leaves or other debris entering the diverter may inhibit the flow of water into the outlet.

If this happens, lift the slip joint, remove the diverter body and clean out the debris

(See page 2 for picture details)



Diverter mounted between metal downpipe, using Raintap shut of valve as control (valve & hose sold seperately)



RTV25

MODELS	CODE
Raintap downpipe diverter	RAINTAP
Raintap diverter shut off valve, 25mm Id poly take off	RTV25

PERTH

PH: 08 9455 1677
FAX: 08 9455 1680
hrproducts@bigpond.com.au

SYDNEY

PH: 02 9725 5733
FAX: 02 725 5283
nsw_hrproducts@bigpond.com

MELBOURNE


PH: 03 9457 7500
FAX: 03 9457 7400
vic_hrproducts@bigpond.com

BRISBANE


PH: 07 3290 1200
FAX: 07 3808 4997
qld_hrproducts@bigpond.com

ADELAIDE

PH: 08 8341 0008
FAX: 08 8341 0707
sa_hrproducts@bigpond.com

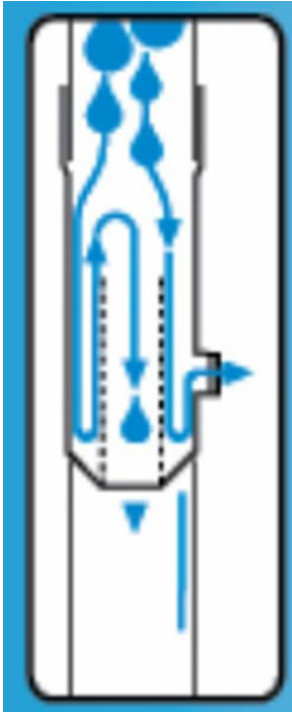

How it works

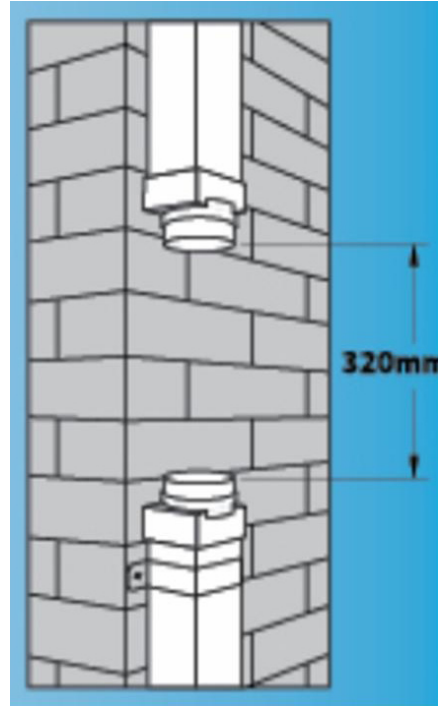

Install



Cleaning

PERTH

PH: 08 9455 1677
FAX: 08 9455 1680
hrproducts@bigpond.com.au

SYDNEY

PH: 02 9725 5733
FAX: 02 725 5283
nsw_hrproducts@bigpond.com

MELBOURNE

PH: 03 9457 7500
FAX: 03 9457 7400
vic_hrproducts@bigpond.com

BRISBANE

PH: 07 3290 1200
FAX: 07 3808 4997
qld_hrproducts@bigpond.com

ADELAIDE

PH: 08 8341 0008
FAX: 08 8341 0707
sa_hrproducts@bigpond.com