

AcquaSaver™



Water Diversion Valve

Hydraulically Operated
Solid Brass Construction
Built-in Dual Check Valves


www.acquasaver.com.au



WaterMark
ATS 5200.477
WMK 60075
AGA



The AcquaSaver™ Valve is a fully automatic adjustable mechanical rainwater/mains water changeover device designed for pressure pump supply systems for harvesting rainwater for the toilet, laundry and household applications with automatic mains backup. It is suitable for up to 2 toilets and washing machine in a single story house.

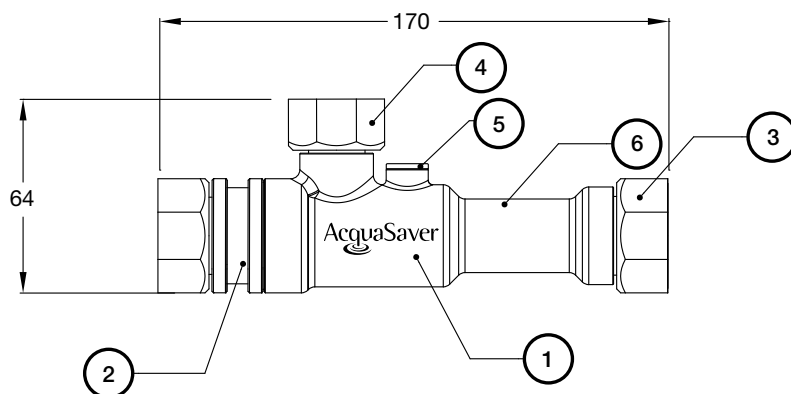

Features

- Easy to install
- Patent design
- Adjustable mains pressure
- Does not require maintenance
- No electrical consumption - No electronic components
- Solid brass construction - Fully weatherproof - Built to last
- Suitable for any pressure pump with sufficient head pressure
- Can be mounted in any position
- Built-in dual check valve for backflow prevention
- 2 Year warranty


Specifications

Max Mains Pressure	500 KPa
Max Pump Pressure	500 KPa
Min Pump Pressure	250 KPa
Max Flow Rate	35 LPM
Max Water Temperature	40 C
Min Water Water Temperature	0 C
Pump Inlet	25mm 1" BSP F
Mains Water in	25mm 1" BSP F
Outlet	20mm 3/4" BSP F
Weight	0.7 KG

Meets Requirements of
ATS 5200.477

Complies to AS/NZS
3500.1 when installed by
a licensed plumber

NOTE: According to AS/
NZS 3500.1 maximum
allowable pressure in
buildings is 500 KPa.

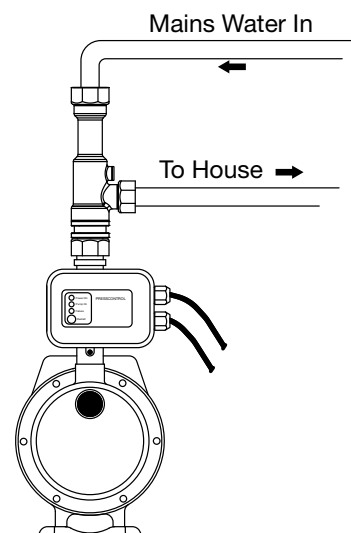

WaterMark
ATS 5200.477
WMK 60075
AGA

available from:

Manufactured by



18 - 20 Cottage Street,
Blackburn VIC 3130 Australia
Tel: +61 3 98 78 15 75
Fax: +61 3 98 94 28 20
Email: info@beltrami.com.au
Web: www.beltrami.com.au

