

HOLMAN

EZY Spray™ 5L




User Guide

www.holmanindustries.com.au

4 Spray Additives

Removing the Grab Handle

- Push down on the **GRAB HANDLE (M)**
- Twist *counter-clockwise* to unhook the **GRAB HANDLE** from the **PRESSURE TANK (E)**
- Pull the **GRAB HANDLE** out of the **PRESSURE TANK**
- Place the **GRAB HANDLE** somewhere clean to avoid dirt touching the lubricated **PLUNGER (N)**
- Add fertiliser or other additives to your **EzySpray®** before filling with water
- Optional:** To include more additive, insert the plunger to push the first shot into the tank
- Optional:** For powder additives, include a cup of water in addition to the additive
- Repeat **Steps 4c and d** as necessary to introduce more additive

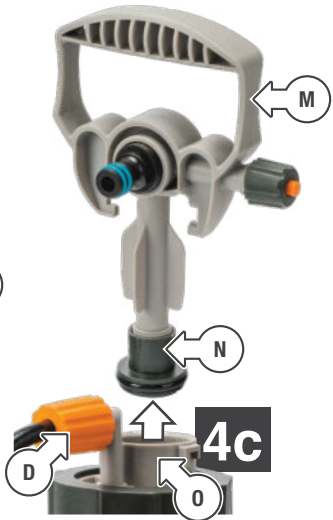


Introducing Spray Additives

- Ensure the **SPRAY HOSE (D)** is attached when removing or replacing the **GRAB HANDLE** to avoid excess additive or water squirting out of the **PRESSURE TANK** outlet
- After removing the **GRAB HANDLE**, follow your additive instructions to pour the correct amount into the **TANK OPENING (O)**



⚠
Using a powder additive? Disperse with a cup of water first.



- Insert the **PLUNGER** into the **TANK OPENING**, in the position shown above, push down and rotate *clockwise* to hook the **GRAB HANDLE** back into place
- Follow **Tank Filling** in **Step 5** to fill the tank with water and mix in the additive

5 Tank Filling

Tank Filling

⚠ *Min. tap pressure required to fill tank: 350kPa*



- Before filling your **EzySpray®**, push excess air from your garden hose by turning on the tap
- ☑ This will stop additional air using the **EzySpray®** capacity
- Once water is flowing out, you can turn off the tap
- Locate the 12mm snap-on **HOSE CONNECTION (K)**

- Attach the **INLET VALVE CONNECTOR (P)**
- Add a standard 12mm garden hose (**Q**) onto this connection
- Ensure the **INLET VALVE (P)** is open and turn the garden hose tap on begin filling

⚠ *Watch the pressure gauge as the reservoir fills with water*

- ☑ The gauge should begin moving towards **MAX** level
- If your water source is *high* pressure, it may trigger the **PRESSURE RELEASE VALVE (L)** when full to stop your **EzySpray®** from over-pressurising:



- If your water source is *low* pressure, the **EzySpray®** will stop filling when it reaches the maximum pressure
- Once your **EzySpray®** is full, turn off your tap and close the **INLET VALVE (P)**
- Disconnect the **INLET VALVE (P)** and garden hose

☑ High or low pressure circumstances are fine and shouldn't damage your **EzySpray®**

⚠ *Watch for excess water from the hose when disconnecting*

⚠
Don't leave unattended while filling!



... powder
... solve
... of
... st

6 Spraying

Spray Functions

- ☑ The **SPRAY HEAD (A)** includes 4 individual spray functions: **JET, CONE, SHOWER** and **MIST**
- a. Before spraying, twist the orange section of the **SPRAY HEAD** to select the desired spray pattern



Trigger Action

- b. To begin spraying, simply point the **SPRAY HEAD** in the desired direction and pull the orange **TRIGGER (C)** lever



8 Troubleshooting

Question

Why won't my EzySpray® work?

Why is the pressure gauge reading below 1 bar?



Answer

- ☑ Your EzySpray® may need to be re-pressurised:
- ☑ This is only necessary if the pressure is below 1 bar. It should be able to hold this minimum pressure for an extended period
- a. Locate **SCHRADER (bike) VALVE (J)** on the opposite side to the **GAUGE (I)**
- b. Unscrew the lid off the valve
- c. Attach a standard bike pump
- d. Pump air in until the gauge reads at least 1 bar
- ☑ Check the **PRESSURE GAUGE (I)** to ensure water is in the tank
- ☑ Check hose for kinks and blockages
- ☑ Check wand for blockages
- ☑ Try each setting on the spray head and check this for blockages

Why is the pressure release valve triggered and spraying water during filling?

- ☑ This is perfectly normal and means the tank is full of water
- ☑ Turn off your tap and disconnect your garden hose

7

Flushing and Cleaning

Spray Functions

⚠ It is important to completely flush your EzySpray® with clean water when finished with chemical spraying

- After you have completed your spraying job and the tank has run out, connect to a tap and refill the tank with clean water
- Point your spray wand into a bucket or anywhere you don't mind the excess fluid flowing
- Hold down the trigger and let the contents flow through until the tank is empty
- Once the tank is empty, we recommend storing your **EzySpray®** in a dry, protected space out of direct sunlight



Question

Answer

Why is my EzySpray® hose difficult to screw onto the tank and wand?

- ✓ The hose included with your **EzySpray®** is designed for the best seal possible, which may be difficult to screw on during initial assembly
- ✓ For the easiest assembly, screw the hose onto the tank outlet *before* screwing onto the spray wand

Why has the pressure gauge stopped rising while filling with water?

- ✓ The **EzySpray®** can still be used when not entirely full
- ✓ It may be due to a low-pressure water source—try filling the tank elsewhere with higher water pressure

Why doesn't my garden hose fit on my EzySpray®?


- ✓ Your hose may be 18mm
- ✓ Unscrew the 12mm hose connection and replace with an 18mm version
- ✓ Visit www.holmanindustries.com.au/product/18mm-brass-sprinkler-adaptor for more info

How do I empty my EzySpray®?

- ✓ Point your spray wand anywhere you don't mind the excess fluid flowing
- ✓ Hold the trigger and let the contents spray until the tank is empty



Thanks for being a
#SMARTGARDENER



We really appreciate having you as a customer, and would like to say thank you for choosing us.

We recommend registering your new product on our website. This will ensure we have a copy of your purchase and will activate an extended warranty. Keep up to date to with relevant product information and special offers available through our newsletter.



www.holmanindustries.com.au/product-registration/

HOLMAN

For the **#SMARTGARDENER**   

Head Office/Service
11 Walters Drive, Osborne Park WA 6017
Tel: +61 8 9416 9999 Fax: +61 8 9416 9920
support@holmanindustries.com.au
www.holmanindustries.com.au

Copyright © 2023 Holman Industries